

SPECIFICATIONS

Frequency Response:

± 1 dB 0 to 950 MHz

Audio

Balanced Stereo; Screw Terminals

Video/RF

75Ω; 'F' Connectors

Video/RF Isolation @ 950 MHz

> 52 dB

Video IF/RF Return Loss

> 22 dB

Control Input

< 2 mA maximum to GND

Power Requirement for External Power Supply:

100-240 VAC ± 2%, 50/60 Hz.
(Supplied)

Physical:

1.5" H x 2.75" W x 5.25" D


Weight: 1 lb.

Stereo A/V Switch

Model 627A

FEATURES

- Video Switch works from 0 to 950 MHz
- Small size
- 'F' connectors
- Unused signals terminated in 75 Ω
- Includes 12 VDC power pack
- Flanged enclosure for easy mounting

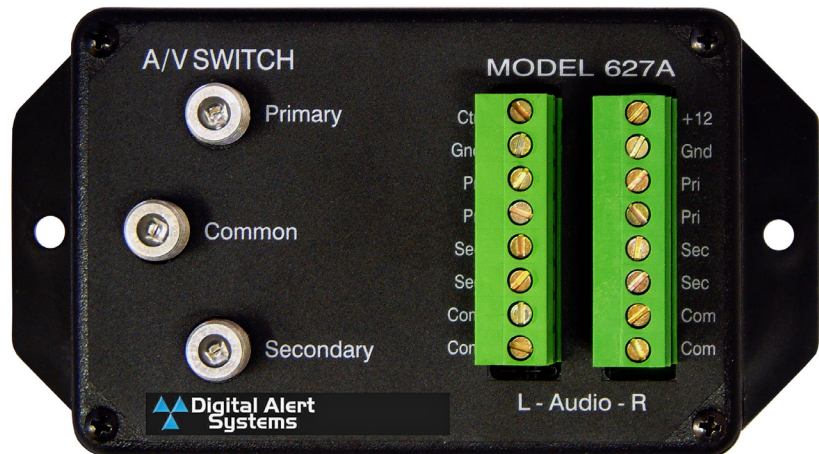

DESCRIPTION

Digital Alert Systems Model 627A Stereo Audio/Video Switch module provides 2 x 1 (AB) balanced stereo audio follow video switching.

The 2 x 1 switch will respond to a contact closure or a transistor switch to ground. The control input is buffered to eliminate high output current drive requirements of the controlling device.

The 627A can be controlled by Digital Alert Systems program timers, remoted controls or CATV Cue Tone receivers.

Emergency Messaging Platforms CATV switching and Control

100 House Ave., P.O. Box 535
Lyndonville, NY 14098
(585)765-2254 (585)765-1155
fax (585)765-9330

www.digitalalertsistemas.com

Copyright © 2010-2024 Digital Alert Systems Inc.
Information herein is considered accurate at the time of
publication. We constantly strive to improve our products
and services therefore some specifications are subject to
change without notice. One-Net^{SE}, DASDEC-II, MultiStation,
Multiplayer, EAS-Net, EAS-CAP, CMPro and CMPlus are
trademarks of Digital Alert Systems Inc. Other logos and
trademarks are property of their respective owners.
All rights reserved