

SPECIFICATIONS

Control Inputs:

Contact Closure to ground or logic input

RF Isolation:

>60 dB @ 950MHz

Attenuation:

+/- 1dB 0 to 950MHz

Absolute Maximum Input Voltage:

+12 VDC

Min Logical High Input Voltage:

+7 VDC

Max Logical Low Input Voltage:

+2VDC

Max Sink Capability:

<2.4 mA

Power Requirement for External Power Supply:

100-240 VAC \pm 2 %, 50/60 Hz
Supplies +12V DC @ <300mA
(UL approved supply included)

Aux Relays Contact Rating:

30 VDC max.; 1A max.

Physical:

19" W X 1.75" H X 7" D, 1 RU

Weight:

5 lbs

Emergency Messaging Platforms CATV switching and Control

100 Housel Ave., P.O. Box 535
Lyndonville, NY 14098
(585)765-2254 (585)765-1155
fax (585)765-9330

www.digitalalertsystems.com

Copyright © 2010-2019 Digital Alert Systems Inc. Information herein is considered accurate at the time of publication. We constantly strive to improve our products and services therefore some specifications are subject to change without notice. One-Net^{SE}, DASDEC-II, MultiStation, Multiplayer, EAS-Net, EAS-CAP, CMPro and CMPlus are trademarks of Digital Alert Systems Inc. Other logos and trademarks are property of their respective owners. All rights reserved.

Stereo A/V and IF/RF Relay Panel

Model R165A

FEATURES

- Balanced Stereo A/V and IF/RF Switches to 950 MHz
- Contact Closure for Activation
- Front Panel Status Indicators
- All Interconnections Made at Rear Panel
- Detachable Screw Terminals for Stereo Audio
- F Connectors for Video (or IF/RF)
- Low Power Control Inputs
- Optional Redundant Power Supplies



APPLICATIONS


- Non-Duplication Switching
- Blackout Switching
- Routing Switching
- Can be configured for up to 5 x 1 Matrix Switching

DESCRIPTION


Model R-165A Audio/Video Relay Panel provides four, independent 2 x 1 (A/B) balanced stereo audio follow video relay switches. The switches are controlled by program timers, remote controls or CATV Cue Tone[®] receivers via contact closures or logic inputs.

Each video relay will also function as a high quality IF/RF 2 X 1 (A/B) switch, with frequency response to 950 MHz.

Auxiliary relays 1 & 2 available for GPI or SAP switching.

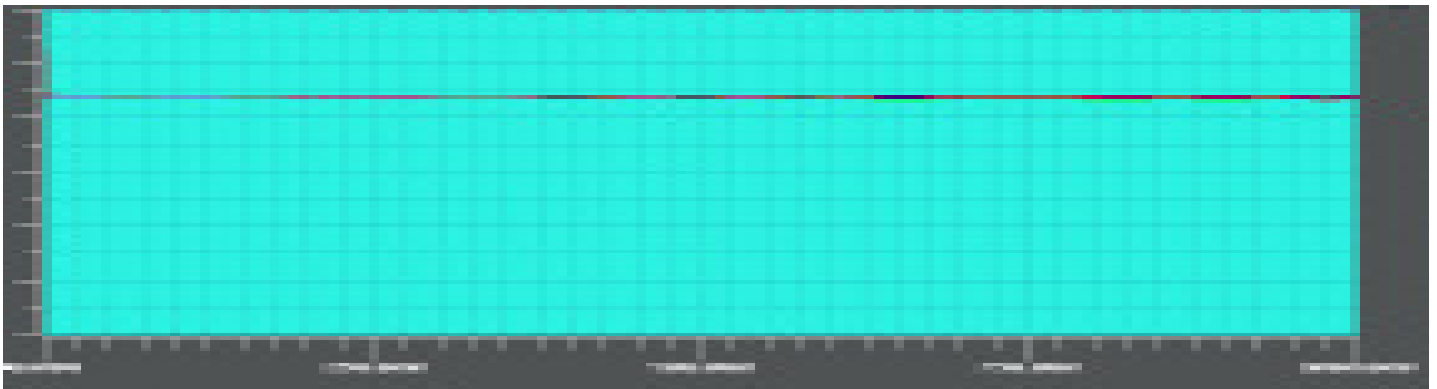

Loss through closed switch, 10 dB per division, 0 to 1000MHz

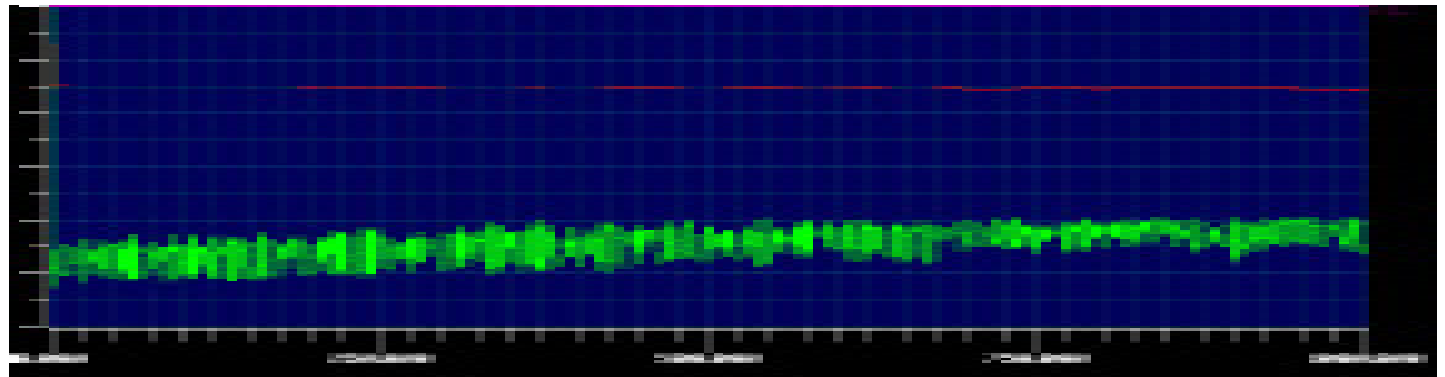

Isolation through open switch, 10 dB per division, 0 to 1000MHz

