

SPECIFICATIONS

Audio Input:

600 Ω balanced

Input Signal Range:

-24 dBmV to +6 dBmV

Digit Validation:

40 mSec. minimum

Inter-digit Time:

40 mSec. to 3 seconds

Digits Per Second:

Maximum 12 @ ± 6 dBmV twist

Set/Reset Inputs:

>20 mSec. pulse to GND.

Relay Outputs:

SPDT; 2A. @ 30 VDC

FCC Registration:

AAK-99W-67353-VP-N

Telephone Ring Voltage:

60 to 150 VAC

Power Requirement:

94 - 240 VAC 50/60 Hz

Physical:

3.5" H x 19" W x 10.25" D

Weight:

5 lbs.

Emergency Messaging Platforms CATV switching and Control

100 Housel Ave., P.O. Box 535
Lyndonville, NY 14098
(585)765-2254 (585)765-1155
fax (585)765-9330

www.digitalalertsistemas.com


Copyright © 2010-2019 Digital Alert Systems Inc.
Information herein is considered accurate at the time of publication. We constantly strive to improve our products and services therefore some specifications are subject to change without notice. One-Net^{SE}, DASDEC-II, MultiStation, Multiplayer, EAS-Net, EAS-CAP, CMPro and CMPlus are trademarks of Digital Alert Systems Inc. Other logos and trademarks are property of their respective owners. All rights reserved

CUE TONE DECODER

Model R173

FEATURES

- Includes 4 Monroe 3185E decoder cards.
- Up to *twelve* (12) decoder cards may be installed
- Unattended telephone answering device
- Field programmable decoders
- External 'Set' and 'Reset' of each decoder for special applications
- Voice Response/Security Control, and telephone line interface standard
- Single or individual audio paths for decoders

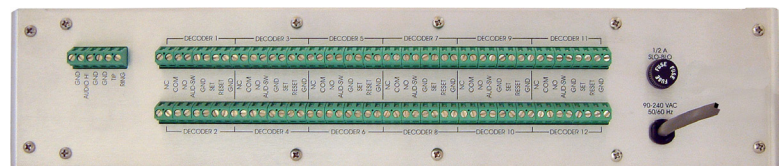

Back Panel

DESCRIPTION

The Model R-173 Cue Tone Decoder utilizes Cue Tone signals transmitted over satellite transponders or standard dial-up telephone lines. Use of the Cue Tone Receiver permits automatic, unattended operation of switching equipment in locations where non-duplication, blackout, or routing is required.

By utilizing the 'Set' and 'Reset' inputs on each channel, the Model R-173 Cue Tone Decoder may be used as a telephone override for the R-149 Program Timer or R-153 Program Timer 2, when controlling Switcher Panels. In this mode, up to 12 channels per Decoder may be controlled.

A Voice Response/Security Control PC Board is installed. The unit responds to a telephone call with a voice message. The board then requires a 3 digit DTMF code entry to allow access to the individual decoders.