


Model 625A RF Sensor Instruction Sheet

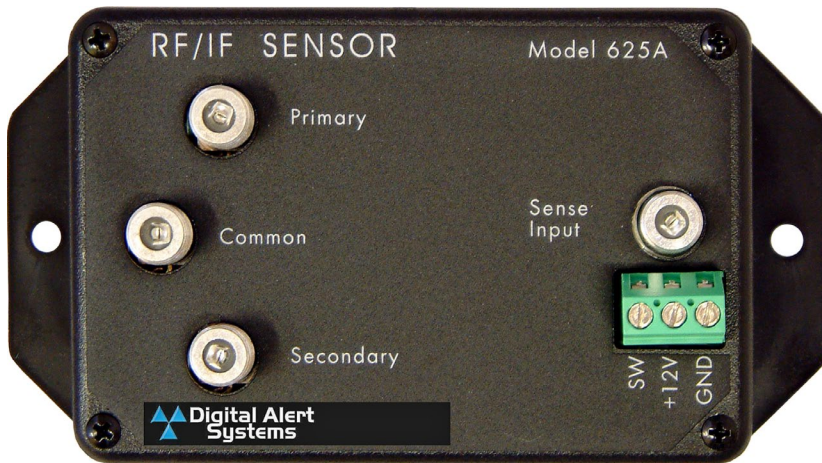

Installation

1. The Sensing Input signal **must** be a single TV video modulated signal with a maximum signal level of +15 dBmV. Use an external bandpass filter and/or pad for multiple channel feed conditions and levels that exceed +15 dBmV.
2. Connect your single TV video modulated signal to the Sense Input. Make sure the level **does not** exceed +15 dBmV.
3. Connect your primary RF source to the primary input and the alternate RF source to the secondary input. The common output is the RF output of the 625A.
4. Attach the White wire of the power supply provided to the +12 VDC input and the Black wire to ground on the 625A.
5. Connect to the SW contacts on the connector and ground as desired, for switching or alarm signaling.

Operation

The 625A's sensing circuit monitors the loss of TV video modulated signal. The absence of the modulated signal caused the 625A to automatically switch to the secondary input. It will remain in this state until the modulated signal returns to the sense input causing the 625A to switch back to the primary RF input.

Alarm connection goes to ground through a solid-state switch when secondary is active.

Specifications

RF Isolation

> 60 dB @ 450 MHz.
> 48 dB @ 950 MHz.

Safe Sense Input Level

+15 dBmV maximum

Drop-Out Level

0 dBmV, +0, -3 dB; delay \approx 250 mSec.

Pick-up Level

0 dBmV, +3, -0 dB; delay \approx 20 mSec.

Power Requirement

Input: 100-240 VAC \pm 2%, 50/60 Hz
Output: 12 VDC

Physical

5.25"H x 2.75"W x 2"D

Design and specifications are subject to change without notice.



WARRANTY

Digital Alert Systems, Inc. warrants to the owners, each instrument and sub-assembly manufactured by them to be free from defects in material and workmanship for a period of one year after shipment from factory. This warranty is applicable to the original purchaser only.

Liability under this warranty is limited to service, adjustment or replacement of defective parts (other than fuses or batteries) on any instrument or sub-assembly returned to the factory for this purpose, transportation charges prepaid.

This warranty does not apply to instruments or sub-assemblies subjected to abuse, abnormal operating conditions, or unauthorized repair or modification.

Since Digital Alert Systems, Inc. has no control over conditions of use, no warranty is made, or implied as to the suitability of our product for the customer's intended use.

THE WARRANTY SET FORTH IN THIS ARTICLE IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESS, IMPLIED OR STATUTORY INCLUDING, BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. Except for obligations expressly undertaken by Digital Alert Systems, in this warranty, Owner hereby waives and releases all rights, claims and remedies with respect to any and all warranties, express, implied or statutory (including without limitation, the implied warranties of merchantability and fitness), and including but without being limited to any obligation of Digital Alert Systems with respect to incidental or consequential damages, or damages for loss of use. No agreement or understanding varying or extending the warranty will be binding upon Digital Alert Systems unless in writing signed by a duly authorized representative of Digital Alert Systems.

In the event of a breach of the foregoing warranty, the liability of Digital Alert Systems shall be limited to repairing or replacing the non-conforming goods and/or defective work, and in accordance with the foregoing, Digital Alert Systems shall not be liable for any other damages, either direct or consequential.

RETURN POLICY TO FACTORY:

Materials returned to Monroe must have a Return Material Authorization number. To obtain a RMA number, contact our A/V Switching & Control Customer Service at 585-765-2254 or fax 585-765-9330. Customers have 30 days to determine that the product ordered fills their need and performs as described in Digital Alert Systems literature. Units returned for approved repair or credit, must be in the original packaging including all parts and paperwork plus be in very good physical condition. If not, the customer is billed the cost to refurbish the unit and for missing accessories and merchandise. No products may be returned for exchange or credit after 12 months of the shipment date. Digital Alert Systems reserves the right to repair or replace units under warranty.

CATV Switching and Control

585-765-2254 fax 585-765-9330
100 House1 Ave. | Lyndonville | NY | 14098
www.digitalalertsystems.com